



Ambalian Company Ltd.

Suite MS-1, Mezzanine Floor, South Gate Centre

Mkoma Road, South-B,

PO Box 22932 – 00100 Nairobi.

Tel +254 - 20 – 266 2166.

Cell +254 – 722 – 806 752.

KRA PIN. P051328875T.

KRA VAT no. 0328138N

Email Info@ambalian.co.ke

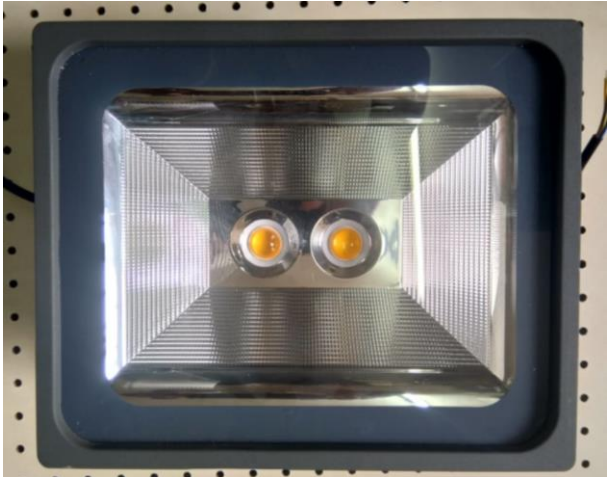
URL www.ambalian.co.ke

LED Lighting

We stock several LED lighting products (in both 240VAC and 12VDC) which we sell as individual lights and also use in projects we undertake for our customers.

LED Flood Lights

	
<u>LD-FL-10W-CL1 (240VAC), Kshs 2,000.</u> 10W, Cool white (7000K). Epistar LED type, Local Driver, IP65 Body; Aluminium, 115*87*90 mm Output 850 Lumens; Beam angle - 120°.	<u>LQ-FL10W-3 (12VDC), Kshs 2,500.</u> 10W, Cool white (7000K). Bridgelux LED type, cool white Output 850 Lumens
	
<u>LQ-FL-30W-03 (240V), Kshs 7,500</u> 30W, Cool white (7000K) Bridgelux 45 Mil LED, Meanwell driver, IP65 Body; Aluminium, 290*245*78 mm Output > 2,400 Lumens, Beam angle - 130°	<u>LD-FL-30W-CL1 (240V), Kshs 6,000</u> Led flood light, 30W, Cool white (7000K) Epistar LED, Meanwell driver, IP65 Body; Aluminium, 225*185*140 mm Output 2,550 Lumens; Beam angle - 120°.

	
<u>LD-FL-30W-CL1 (12VDC), Kshs 5,800</u> 30W, Cool white (7000K) Epistar LED, Local driver, IP65 Body; Aluminium, 225*185*140 mm Output 2,550 Lumens; Beam angle - 120°	<u>LD-FL-100W-CL1 (240V), Kshs 17,500</u> Led flood light, 30W, Cool white (7000K) Epistar LED, Meanwell driver, IP65 Body; Aluminium, 225*185*140 mm Output 2,550 Lumens; Beam angle - 120°.

LED Flood Lights with Passive infra Red (PIR) Sensor

	
<u>LQ-FL30W-1 (240V), Kshs 8,500</u> 30W, Cool white (7000K) Bridgelux 45 Mil LED, Meanwell driver, IP65 Body; Aluminium, 225*185*130mm Output > 3,600 Lumens, Beam angle - 130°	<u>LQ-FL50W-1 (240V), Kshs 10,500</u> 50W, Cool white (7000K) Bridgelux 45 Mil LED, Meanwell driver, IP65 Body; Aluminium, 287*236*160mm Output > 4,500 Lumens, Beam angle - 130°

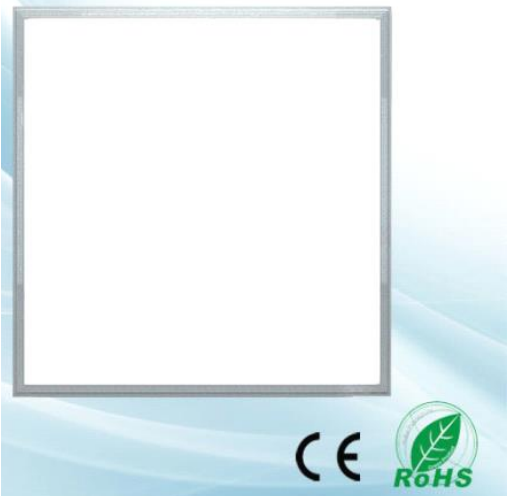
LED Street Lights

	
<u>LQ-SL470-50W (240VAC), Kshs 15,200</u> 50W, Cool white (7000K) Bridgelux 45 Mil LED, Meanwell driver, IP65 Body; Aluminium, 470*270*110 mm Output > 3,600 Lumens; Beam angle - 120°.	<u>LQ-SL470-50W (12VDC), Kshs 15,200</u> 50W, Cool white (7000K) Bridgelux 45 Mil LED, Meanwell driver, IP65 Body; Aluminium, 470*270*110 mm Output > 4,500 Lumens; Beam angle - 120°.
	
<u>LQ-SL530-50W (240VAC), Kshs 15,200</u> 50W, Cool white (7000K) Bridgelux LED,; Aluminium Body 530 mm Output > 3,600 Lumens; Beam angle - 120°.	<u>LQ-SL530-50W (24VDC), Kshs 15,200</u> 50W, Cool white (7000K) Bridgelux LED,; Aluminium Body 530 mm Output > 4,500 Lumens; Beam angle - 120°.

LED Bulbs

	
<u>LQ-BC60-5*1W (240V), Kshs 1,200</u> 5 watts Bridgelux LED Diameter:60mm Temperature:-20-45°C Base:E27. Weight:65 ± 2g Colours; warm white (WW), Clear white (CW) Output (Lumens); WW:365, CW:394	<u>LQ-SP3*1W-2 (240V), Kshs 500</u> 3 watts Bridgelux LED 85~265V AC, non -dimnable Bases:E27, GU10. Colours; warm white (WW), Clear white (CW)
	
<u>LQ-SP3*2W-1 (240V), Kshs 800</u> 6watts Bridgelux LED 85~265V AC, non -dimnable Base: E27. Colours; warm white (WW), Clear white (CW)	<u>LQ-SP3*2W-1 (240V), Kshs 800</u> 6 watts Bridgelux LED 85~265V AC, non -dimnable Base:GU10. Colours; warm white (WW), Clear white (CW)

LED Tubes and Others

 CE RoHS	 CE RoHS
<u>LQ-T8 600-10W (240V), Kshs 1,520</u> 10W, Natural white, clear cover. 600mm, , 85~265VAC Led flood light, Epistar LED, Meanwell driver, IP65 Body; Aluminium, 225*185*140 mm Output 2,550 Lumens; Beam angle - 120°.	<u>LQ-T8 1200-18W (240V), Kshs 2,900</u> <u>LQ-T8 1200-22W (240V), Kshs 3,280</u> <u>LQ-T8 1500-22W (240V), Kshs 3,520</u> 18/ 22W, Natural white, clear cover. 1200mm, , 85~265VAC Epistar LED, Meanwell driver
 CE RoHS	
<u>LQ-P66-48W (240V), Kshs 12,500</u> 85~265V AC, Samsung 3014SMD LEDs (484pcs) Clear white, with steel rope Size 600 mm by 600 mm. can be used in a banking hall.	<u>LD-HBL-60W-CL1 (240V), Kshs 15,500</u> Led high bay light, 60W, Cool white (7000K), Bridgelux LED, Meanwell driver, IP65, Body Material: Aluminium, Output 5,400 Lumens; Beam angle - 45°